



**R88**

- ▶ 1. ПРИЛОЖЕНИЕ
- ▶ 1. ХАРАКТЕРИСТИКИ
- ▶ 1. ТЕХНИЧЕСКИ ДАННИ
- ▶ 2. РАЗМЕРИ
- ▶ 2. МОНТАЖ
- ▶ 3. МОНТАЖ С КЛАПАН R160
- ▶ 3. ИНСТРУКЦИЯ ЗА МОНТАЖ
- ▶ 4.
- ▶ 4. ЗАКЛЮЧЕНИЕ



## R88



GIACOMINI

R88


### ► Характеристики

R88

3

- 0,7 Мпа (7 бар)
- \* - 1,4 Мпа (14 бар)
- \* - 120 °C
- 1/4" - 3/8" - 1/2"

\*

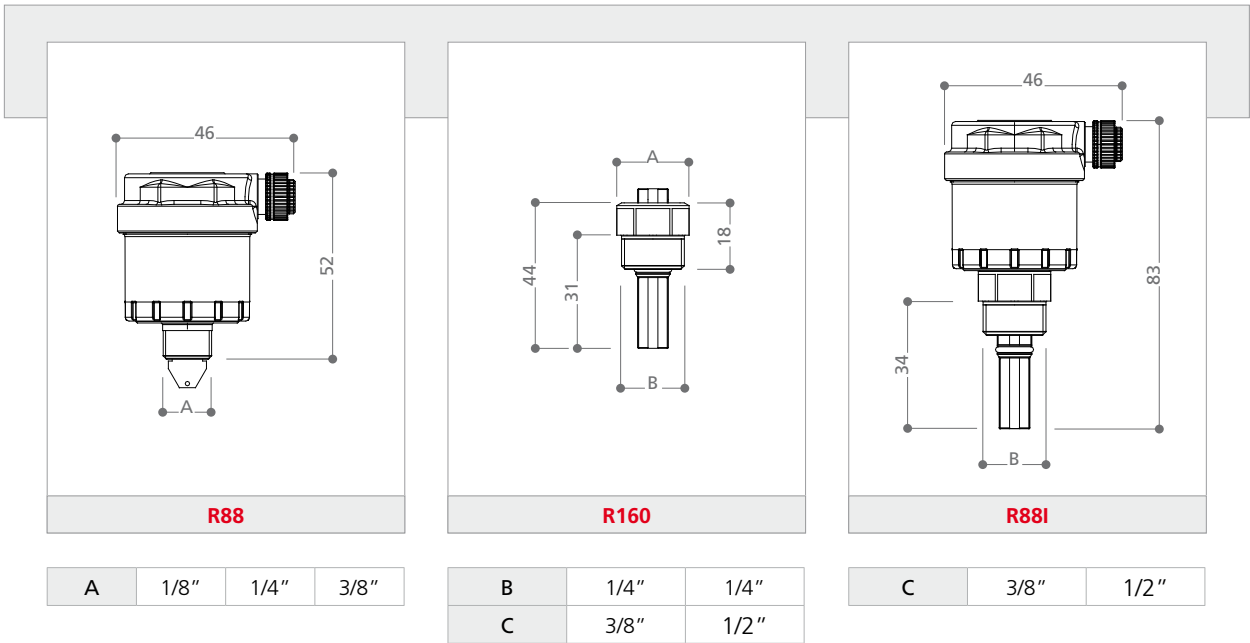

R160, 1/4" 3/8" 1/4" 1/2".

( R88 R160)  
R88I 3/8" 1/2".






# R88

## R160

R160

R88

R160,

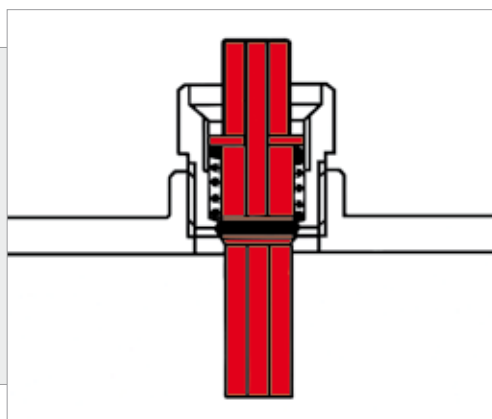



R160,


R88  
R88.

R88I.

R160,

R88

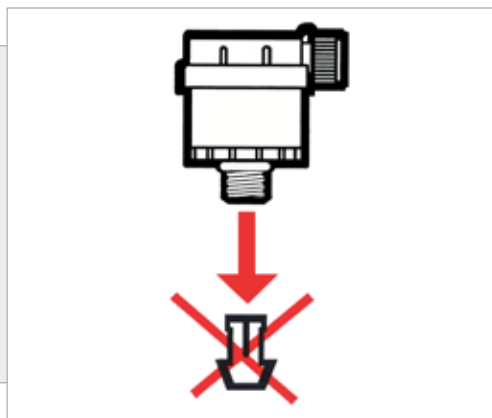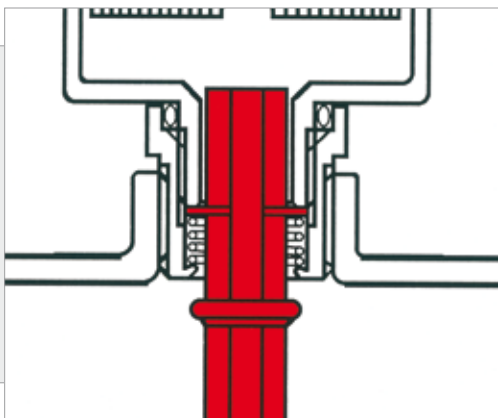

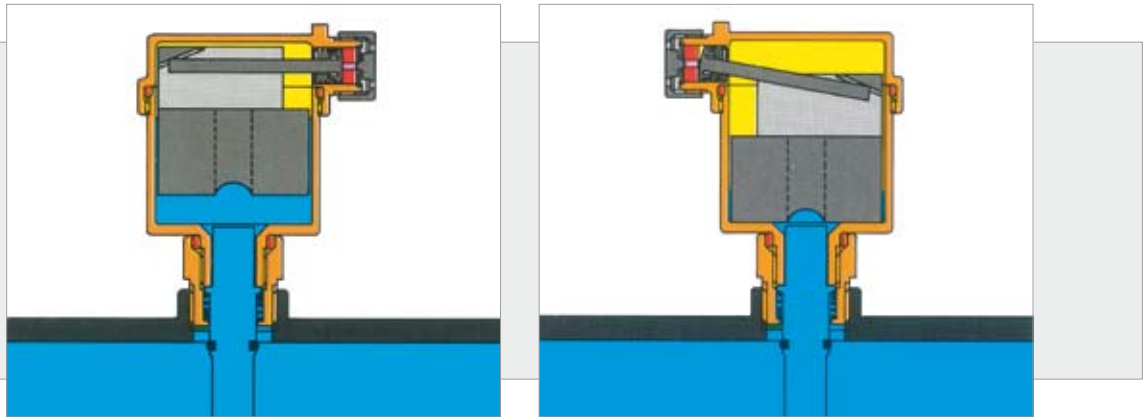

## ▸ Заключение

UNI EN 12164 CW 617 N,  
NBR.

PP,

- 0,7 (7 )  
- 1,4 (14 )  
- 120



**0111RF**

ISO 9001: 2000



**R88**



**GIACOMINI SPA**  
Via per Alzo,39  
28017 San Maurizio d'Opaglio (NO) ITALY  
tel. 0322 923111 - fax 0322 96256  
e-mail: [info@giacomini.com](mailto:info@giacomini.com)  
internet: [www.giacomini.com](http://www.giacomini.com)

“ ”  
“ ” 253  
/ : 02 / 85 69 174  
.: +359 878 20 55 33  
[sales@terratherm-bg.com](mailto:sales@terratherm-bg.com)  
[www.terratherm-bg.com](http://www.terratherm-bg.com)